

In-situ monitoring and control of mechanical wavefunction collapse: an optomechanical scheme

A. A. Gangat*

ARC Centre for Engineered Quantum Systems, School of Mathematics and Physics,
The University of Queensland, St Lucia, QLD 4072, Australia

(Dated: XX March 2013)

The optomechanical system demonstrated by Sankey *et al.* [Nat. Phys. **6**, 707 (2010)] enables different types of parametric couplings between optical fields and mechanical motion to be achieved simultaneously, including one that is purely quartic to lowest order in the mechanical motion. We propose and analyze a scheme that uses this capability to monitor and control *in-situ* the conditional phonon number (n_b) variance of a mechanical mode via continuous weak measurements of n_b and n_b^2 while simultaneously cooling to $\langle n_b \rangle \approx 1$. Simulations show a monotonic decrease in the steady-state phonon number variance with increasing measurement strength.

PACS numbers: 42.50.Lc, 42.50.Wk, 07.10.Cm, 03.65.Ta

Introduction.—Creating, manipulating, and observing quantum phenomena in macroscopic mechanical degrees of freedom is of both fundamental and applied interest, and a large amount of activity toward these ends has taken place within the context of optomechanics [1], wherein optical field modes are coupled to the motion of mechanical resonators. Mechanical energy quantization [2–4], mechanical mode entanglement [5], and detection of space-time quantization effects [6], for example, have all been considered in such a setting. Particularly well-suited to mechanical energy quantization detection is the “membrane-in-the-middle” optomechanical system [7], in which a dielectric membrane is suspended in the middle of an optical cavity and orthogonal to the cavity axis. Depending on the equilibrium position x_0 of the membrane along the cavity axis, the system can exhibit a modulation of the energy of a full cavity optical mode a that could be either linear or quadratic in the mechanical membrane displacement x along the cavity axis from x_0 : $H \propto xa^\dagger a$ or $H \propto x^2 a^\dagger a$. With the mechanics in the quantum regime and under the rotating wave approximation, the latter becomes for a single mechanical mode b : $H \propto b^\dagger b a^\dagger a$, thereby providing a channel for continuous QND measurement of mechanical energy by driving a and continuously monitoring the transmitted signal. The linear in x coupling provides a channel for actively cooling the mechanical mode to low occupation numbers [8]; driving a at the red mechanical sideband induces a net up-conversion of the pumped photons via absorption of mechanical quanta. Further, tilting the membrane with respect to the cavity axis can change the optomechanical modulation of select optical spectra from x^2 to x^4 at lowest order in x [9], providing a channel for QND measurements of $b^\dagger b + (b^\dagger b)^2$. Also, an examination of the full optical spectra of the system reveals that the x , x^2 , and x^4 couplings may all be achieved simultaneously with independent optical channels.

In this paper we show that the capability of simultaneous x , x^2 , and x^4 optomechanical coupling can be

used to monitor and control *in-situ* the variance of the phonon number distribution of a macroscopic mechanical mode that is coupled to a thermal bath of very high average occupation number while *simultaneously* actively cooling the mechanical mode to the single quanta regime. The essential physics behind this scheme is the interplay between narrowing of the number distribution due to acquisition of information via measurement and broadening of the distribution due to loss of information to the unmonitored dissipation channels. The continuous weak measurement of n_b through the x^2 coupling effects the action of collapsing the phonon distribution toward a single (random) Fock state, while coupling to dissipative channels induces a broadening of the distribution toward a thermal state. The (time-averaged) steady-state between these competing processes has a finite phonon number variance. Increasing the n_b measurement strength, which may be done *in-situ* by increasing the drive strength on the optical mode coupled to x^2 , results in a smaller steady-state phonon number variance because the information acquisition rate is thereby increased. Simultaneously, the information from the x^4 measurement channel may be combined with that from the x^2 channel to determine the steady-state variance. Thus, the wavefunction width of a macroscopic mechanical mode may be monitored and controllably collapsed in the number state basis. The simultaneous mechanical mode cooling through the x coupling serves the purpose of lowering the *effective* bath temperature of the mode, thereby facilitating the viability of the scheme at smaller x^2 coupling strengths than would be required otherwise.

Model.—We first follow some of the analysis of [8, 10] for the case of x^2 optical spectrum modulation in the case of a two-sided cavity. In the membrane-in-the-middle system, when the membrane is orthogonal to the cavity axis the finite optical transmittance of the membrane and the finite optomechanical coupling give rise to the following Hamiltonian at select values of x_0 and valid for small x of a single mechanical mode:

$\tilde{H}_1 = \hbar\omega_1 a_{1L}^\dagger a_{1L} + \hbar\omega_1 a_{1R}^\dagger a_{1R} - \hbar J_1 (a_{1L}^\dagger a_{1R} + \text{H.c.}) - \hbar g_1 (x/x_{\text{zpf}})(a_{1L}^\dagger a_{1L} - a_{1R}^\dagger a_{1R})$, where J_1 is proportional to the transmittance of the membrane for $a_{1L/1R}$, g_1 is an optomechanical coupling constant, x_{zpf} is the zero point motion of the mechanical mode, and $a_{1L/1R}$ are one of the cavity mode pairs, degenerate in frequency but of different spatial mode functions, that would arise on the left/right of the membrane with frequency ω_1 if there were no interactions ($J_1 = g_1 = 0$). In terms of the full cavity modes $a_{1,\pm} = (a_{1L} \pm a_{1R})/\sqrt{2}$, the Hamiltonian is $H_1 = H_1^{(0)} + H_1^{(\text{int})}$, where $H_1^{(0)} = \hbar\omega_1 a_{1-}^\dagger a_{1-} + \hbar\omega_1 a_{1+}^\dagger a_{1+}$, $H_1^{(\text{int})} = -\hbar g_1 (x/x_{\text{zpf}})(a_{1+}^\dagger a_{1-} + a_{1-}^\dagger a_{1+})$, and $\omega_{1\pm} = \omega_1 \mp J_1$. Thus, though $a_{1,\pm}$ are degenerate when the interactions are off, turning on the interactions alters the optical spectrum of $a_{1,\pm}$ such that, in the physically relevant case of $J_1 \gg g_1(x/x_{\text{zpf}})$, the transmittance lifts the degeneracy by an amount $2\hbar J_1$, and the optomechanical interaction induces a further perturbation of the spectrum that is quadratic in x for small x .

As the spectral splitting of two modes due to a linear coupling between them is always quadratic in the coupling strength, we can go beyond [8, 10] to analogously model the case of the x^4 spectrum modulation of the full cavity optical modes $a_{2,\pm} = (a_{2L} \pm a_{2R})/\sqrt{2}$ that was demonstrated in [9]: $H_2 = H_2^{(0)} + H_2^{(\text{int})}$, where $H_2^{(0)} = \hbar\omega_2 a_{2-}^\dagger a_{2-} + \hbar\omega_2 a_{2+}^\dagger a_{2+}$, $H_2^{(\text{int})} = -\hbar g_2 (x/x_{\text{zpf}})^2 (a_{2+}^\dagger a_{2-} + a_{2-}^\dagger a_{2+})$, and $\omega_{2\pm} = \omega_2 \mp J_2$.

We are interested here in the case of simultaneous x , x^2 , and x^4 coupling for the fundamental mechanical mode b so that the full Hamiltonian is given by $H = \hbar\Omega b^\dagger b + H_1 + H_2 + H_{1,\text{drive}} + H_{2,\text{drive}} + H_{\text{diss}}$, where Ω is the fundamental mechanical mode frequency, $H_{j,\text{drive}} = \hbar(\epsilon_j^* a_{j+} e^{i\omega_j t} + \text{H.c.})$ encapsulates coherent drives of amplitude ϵ_j on optical modes a_{j+} , and H_{diss} encapsulates all of the intrinsic and induced dissipation channels, further discussed below, for the relevant optical and mechanical modes, including the mechanical sideband cooling bath due to the x coupling [11].

We may now make explicit the different order in g_j perturbations of the spectra due to $H_j^{(\text{int})}$ by using the approach of [8]; the strategy is to make a time dependent canonical transformation determined by the $O(g_j)$ mechanical dynamics to obtain a transformed system Hamiltonian for which the lowest order in the perturbation are quadratic: $e^{i(S_1+S_2)}(\hbar\Omega b^\dagger b + H_1 + H_2)e^{-i(S_1+S_2)} = \hbar\Omega b^\dagger b + H_1^{(0)} + H_2^{(0)} + \frac{i}{2}[S_1, H_1^{(\text{int})}] + \frac{i}{2}[S_2, H_2^{(\text{int})}] + \frac{i}{2}[S_1, H_2^{(\text{int})}] + \frac{i}{2}[S_2, H_1^{(\text{int})}] + O(g_j^3)$, where $S_j = x_{\text{ind},j} p/\hbar - p_{\text{ind},j} x/\hbar$, $x = x_{\text{zpf}}(b^\dagger + b)$, $p = i\hbar(b^\dagger - b)/x_{\text{zpf}}$, $x_{\text{zpf}} = \sqrt{\hbar/2m\Omega}$, and m is the mechanical mode effective mass. As mentioned in [8], the quadratic optomechanical interaction induces, to first order in g_1 , the mechanical motion $x_{\text{ind},1} = F_1(t)/m(\Omega^2 - 4J_1^2)$ and $p_{\text{ind},1} = \dot{F}_1(t)/(\Omega^2 - 4J_1^2)$, where $F_j(t) =$

$\frac{\hbar g_j}{x_{\text{zpf}}}(2b^\dagger e^{i\Omega t} + \text{H.c.})^{j-1}(a_{j+}^\dagger a_{j-} e^{-i2J_j t} + \text{H.c.})$. Similarly, the quartic optomechanical interaction produces a radiation pressure force with two frequency components so that, to first order in g_2 , $x_{\text{ind},2} = \frac{1}{2} \frac{F_{2-}}{m(\Omega^2 - (2J_2 - \Omega)^2)} + \frac{1}{2} \frac{F_{2+}}{m(\Omega^2 - (2J_2 + \Omega)^2)}$ and $p_{\text{ind},2} = m\dot{x}_{\text{ind},2}$, where $F_{2,\pm} = \frac{2\hbar g_2}{x_{\text{zpf}}}(a_{j+}^\dagger a_{j-} b^\dagger e^{-i(2J \pm \Omega)t} + \text{H.c.})$. Thus finding the expansion of the system Hamiltonian in powers of g_j , we plug into the full Hamiltonian, transform to a picture moving at the zeroth order optical and mechanical dynamics, make the rotating wave approximation, and drop the first order in g_j terms of the expansion (as they do not modify the optical spectra) to find the effective Hamiltonian $H_{\text{eff}} = H_{1,\text{eff}}^{(2)} + H_{2,\text{eff}}^{(2)} + H'_{1,\text{drive}} + H'_{2,\text{drive}} + H_{\text{diss}} + O(g_j^3)$, where

$$H_{1,\text{eff}}^{(2)} = \hbar \frac{g_1^2}{2} \left(\frac{4J_1}{4J_1^2 - \Omega^2} \right) (n_{1-} - n_{1+}) (1 + 2n_b) + \hbar \frac{g_1^2}{2} \left(\frac{2\Omega}{4J_1^2 - \Omega^2} \right) (2n_{1-}n_{1+} + n_{1+} + n_{1-}), \quad (1)$$

$$H_{2,\text{eff}}^{(2)} = \hbar \frac{g_2^2}{2} (n_{2-} - n_{2+}) (A_2 n_b^2 + A_1 n_b + A_3) - \hbar g_2^2 \frac{4\Omega}{J_2^2 - \Omega^2} n_{2+} n_{2-} (3 + 4n_b), \quad (2)$$

$n_b = b^\dagger b$, $H'_{j,\text{drive}} = \hbar(\epsilon_j^* a_{j+} + \text{H.c.})$, H_{diss} is unchanged as it is modeled with Lindblad superoperators (see below) that are invariant under transformation to the zeroth order dynamics, $A_2 = \frac{4}{J_2} + \frac{2J_2}{J_2^2 - \Omega^2}$, $A_1 = \frac{4}{J_2} + \frac{2J_2 + 4\Omega}{J_2^2 - \Omega^2}$, $A_3 = \Omega(3 + \Omega/J_2)/(J_2^2 - \Omega^2) + (1/J_2 + 2J_2/(J_2^2 - \Omega^2))$, and $A_4 = \Omega(3 - \Omega/J_2)/(J_2^2 - \Omega^2) + (1/J_2 + 2J_2/(J_2^2 - \Omega^2))$. These expressions are valid for all values of the ratios Ω/J_j . We see here that the coupling enhancement when $2J_1 - \Omega \ll J_1, \Omega$ noted in [8] for x^2 coupling has an analogous counterpart in the case of x^4 coupling when $J_2 - \Omega \ll J_2, \Omega$; if $J_j \gg \Omega$ the second lines of $H_{1,\text{eff}}^{(2)}$ and $H_{2,\text{eff}}^{(2)}$ become negligible.

It is clear that the frequency of mode $a_{1,\pm}$ is sensitive to n_b and the frequency of $a_{2,\pm}$ is sensitive to both n_b and n_b^2 . When modes a_{j+} are continuously driven, their outputs therefore yield continuous information on n_b and n_b^2 . However, in the case that $2J_1 - \Omega \ll J_1, \Omega$, the output of a_{1+} is actually sensitive to $(n_{1-} - n_b)$. Although we model the situation where a_{j-} are left undriven, $H_j^{(\text{int})}$ support secondary Raman processes whereby quanta from a_{j+} combine with phonons to scatter into a_{j-} . Letting $\kappa_{j\pm}$ be the total intrinsic dissipation rates of $a_{j\pm}$, reference [8] determines this to occur at a rate $\gamma_{1,R}\bar{n}_b = \kappa_{1+,R}\bar{n}_{1+} = g_1^2 \bar{n}_{1+} \bar{n}_b \kappa_{1-}/(2J_1 - \Omega)^2$ for scattering from a_{1+} to a_{1-} , and an analogous golden rule calculation yields $\gamma_{2,R}\bar{n}_b = \kappa_{2+,R}\bar{n}_{2+} = g_2^2 \bar{n}_{2+} \bar{n}_b \kappa_{2-}/(2J_2 - 2\Omega)^2$ for scattering from a_{2+} to a_{2-} . Therefore $\gamma_{1,R}$ is also amplified when $2J_1 - \Omega \ll J_1, \Omega$, and a non-negligible n_{1-} may

result. In the case of quantum jump measurements, although not noted in the study of [8], this Raman process can thereby register as a double jump in the output signal of a_{1+} due to its sensitivity to $(n_{1-} - n_b)$. Similarly, in the case of $J_2 - \Omega \ll J_2, \Omega$, a_{2+} becomes sensitive to n_{2-} and $\gamma_{2,R}$ is amplified so that n_{2-} may become non-negligible. We are interested here, however, in the case of long time-averages of the outputs of a_{j+} and assume that even in the cases where the second terms of $H_j^{(2)}$ become significant, their time-averaged contributions to the output signals may be subtracted away by, for example, independently monitoring the output of a_{j-} . For simplicity, then, we deal with the following model Hamiltonian:

$$H_{\text{model}} = -\frac{\hbar}{2}G_1 n_{1+} n_b - \frac{\hbar}{2}G_2 n_{2+} (n_b^2 + A n_b) + H'_{1,\text{drive}} + H'_{2,\text{drive}} + H_{\text{diss}}, \quad (3)$$

where $G_1 = 2g_1^2(\frac{1}{2J_1 - \Omega} + \frac{1}{2J_1 + \Omega})$, $G_2 = g_2^2 A_2$, $A = A_1/A_2$, and dissipation due to the environment and Raman processes is contained in H_{diss} .

Collapse monitoring and control.—The protocol for *in-situ* control and monitoring of phonon number wavefunction collapse is as follows. As established in [4], the steady-state phonon number distribution under continuous measurement of n_b is the result of a competition between conditional narrowing of the number distribution due to the information acquired in the measurement record and broadening due to loss of information to the unmonitored dissipation channels. Although the conditional number distribution itself fluctuates in time due to the continuous weak measurement, for the case of constant measurement and dissipation rates the time-average of the conditional number distribution variance (in steady-state) is constant. If the dissipation rates are constant, increasing the measurement strength on n_b results in a smaller time-averaged steady-state conditional variance for n_b . As the n_b measurement strength is proportional to the drive on a_{1+} , the drive strength therefore serves as an *in-situ* experimental knob for the phonon number variance. Selecting any values for the a_{j+} drive strengths, one may take a long time-average of both the output of a_{1+} and its squared value to respectively extract $\langle n_b \rangle_c$ and $\langle n_b^2 \rangle_c$, where $\langle u \rangle_c$ denotes an ensemble average of the operator u conditioned on the measurement record. Simultaneously, one may obtain $\langle n_b^2 \rangle_c + A \langle n_b \rangle_c$ from a long time-average of the output of a_{2+} , and use the information from a_{1+} to determine $\langle n_b^2 \rangle_c$. Thus one obtains sufficient information to determine (in a time-averaged sense) the steady-state conditional phonon number variance $\overline{\sigma_b^2} = \langle n_b^2 \rangle_c - \langle n_b \rangle_c^2$ for the selected values of the drive strengths. Repeating this procedure for incrementally stronger values of the drive on a_{1+} , one may observe the controlled collapse of the phonon number wavefunction. By relying

on the a_{1+} measurement channel to collapse the wavefunction, this protocol accommodates the fact that the experimentally observed g_2 is very weak [9]; sufficiently long time-averages of the output of a_{2+} can yield the desired information regardless of the value of g_2 .

Being able to collapse the wavefunction in this manner, however, implies certain parameter constraints. The study in [4] established two fundamental conditions for observing phonon number quantum jumps via continuous measurement of the output of a_{1+} : both the n_b measurement rate Γ_1 and κ_{1+} must be much greater than the mechanical Fock state decay rate. However, these conditions also apply for observation of phonon number wavefunction collapse via continuous measurement because the jumps arise only when the phonon number variance is very small. The study in [4] considered the special case of a one-sided cavity where coupling to a thermal bath was the only source of mechanical dissipation. In the more realistic case that we consider here of a two-sided cavity with continuous sideband cooling of the mechanical mode, the fundamental conditions may be expressed as $\Gamma_1^{(\text{max})}, \kappa_{1+} \gg \gamma_{\text{th}}[(\bar{n}_{\text{th}} + 1)\bar{n}_b + \bar{n}_{\text{th}}(\bar{n}_b + 1)] + (\gamma_{1,R} + \gamma_{2,R} + \gamma_{\text{opt}})\bar{n}_b$, where $\Gamma_1^{(\text{max})}$ denotes the maximum attainable value of Γ_1 , γ_{th} is the mechanical dissipation rate to the mechanical mode thermal bath of average occupation $\bar{n}_{\text{th}}$, γ_{opt} is the mechanical dissipation rate to the zero temperature optical cooling bath induced by the sideband cooling [11], and $\gamma_{j,R}$ are due to the Raman scattering processes described above. Although $\gamma_{1,R}$ is itself proportional to n_{1+} , which must be increased to increase Γ_1 for each successive collapse increment of the protocol, the total mechanical cooling rate $\gamma_{\text{cool}} = \gamma_{1,R} + \gamma_{2,R} + \gamma_{\text{opt}}$ may be kept constant by simultaneously reducing γ_{opt} via *in-situ* adjustment of the sideband cooling drive [11].

The constraints on $\Gamma_1^{(\text{max})}$ and κ_{1+} show that the feasibility of the scheme entails that $\bar{n}_b$ be small. From detailed balance, $\bar{n}_b = (\gamma_{\text{cool}}\bar{n}_{\text{opt}} + \gamma_{\text{th}}\bar{n}_{\text{th}})/(\gamma_{\text{cool}} + \gamma_{\text{th}})$. As the optical bath occupation $\bar{n}_{\text{opt}}$ is very small, choosing $\gamma_{\text{cool}} \approx \gamma_{\text{th}}\bar{n}_{\text{th}}$ yields $\bar{n}_b \approx 1$ and $\Gamma_1^{(\text{max})}, \kappa_{1+} \gg 4\gamma_{\text{th}}\bar{n}_{\text{th}}$. Thus, steady-state $\bar{n}_b \approx 1$ can be achieved via continuous sideband cooling that is simultaneous with the collapse measurement and quantum jump measurement protocols without significantly increasing $\Gamma_1^{(\text{max})}$ beyond what would be required in the absence of continuous sideband cooling where the mechanical mode was instead passively cooled to $\bar{n}_b \approx 1$. Observing phonon number quantum jumps and wavefunction collapse with simultaneous sideband cooling may prove to be an experimentally more viable route than with passive cooling.

The authors of [8, 10] derive the additional condition $g_1 > \kappa_+ \kappa_-$ for energy quantization detection by requiring that the phonon number measurement rate be greater than the mechanical Fock state decay rate due to the Raman process described above. However, because the

measurement plays the dual role of detecting the Fock state and also collapsing the distribution to create the Fock state, what is actually required is that the measurement rate be *much* greater than the Fock state decay rate. This was established in [4] and is reflected in the constraint on $\Gamma_1^{(\max)}$ above. The true requirement is therefore $g_1 \gg \kappa_+ \kappa_-$.

Numerical demonstration.—In contrast to [8], we consider the case where the phonon measurement optical modes a_{j+} are strongly driven so that $a_{j+} \rightarrow \alpha_j + a'_{j+}$, where α_j are the steady-state background amplitudes of a_{j+} and a'_{j+} are the quantum fluctuations on top of α_j . We may therefore proceed in analogy to [4] to move to a displaced picture for modes a_{j+} and use the following stochastic master equation [12] (SME) for the system density matrix ρ to treat the transmitted outputs of a_{j+} as continuously observed via homodyne detection and the rest of the dissipative channels as unobserved: $d\rho = -\frac{i}{\hbar}[H_I, \rho]dt + (\gamma_{\text{th}}(\bar{n}_{\text{th}} + 1) + \gamma_{\text{cool}})\mathcal{D}[b]\rho dt + \gamma_{\text{th}}\bar{n}_{\text{th}}\mathcal{D}[b^\dagger]\rho dt + \sum_{j=1}^2(\kappa_{j+} + \kappa_{j+,R})\mathcal{D}[a_{j+}]\rho dt + \sum_{j=1}^2\sqrt{\eta\kappa_{j+,t}}dW_j\mathcal{H}[a_{j+}e^{-i\frac{\pi}{2}}]\rho$. Here we have dropped the prime from a'_{j+} for convenience, $H_I = -\hbar\frac{\chi_1}{2}(a_{1+}^\dagger + a_{1+})n_b - \hbar\frac{\chi_2}{2}(a_{2+}^\dagger + a_{2+})(n_b^2 + An_b)$ is the linearized interaction Hamiltonian in the displaced picture, $\chi_j = 2G_j\alpha_j$, $\mathcal{D}[c]\rho = \rho c^\dagger - c^\dagger \rho / 2 - \rho c^\dagger c / 2$ is the dissipation superoperator, $\mathcal{H}[c]\rho = c\rho + \rho c^\dagger - \text{Tr}(c\rho + \rho c^\dagger)\rho$ is the measurement superoperator, η is the efficiency of the detectors, and dW_j are independent Wiener increments. Each optical mode a_{j+} has three dissipation channels at zero temperature with corresponding dissipation rates: reflected signal ($\kappa_{j+,r}$), transmitted signal ($\kappa_{j+,t} = \kappa_{j+} - \kappa_{j+,r}$), and Raman scattering decay ($\kappa_{j+,R}$) as discussed above. The mechanical mode b has four dissipation channels: thermal bath dissipation (γ_{th}) and cooling dissipation (γ_{cool}), consisting of sideband cooling and two Raman scattering channels. As explained above, γ_{cool} may be considered constant over the entire collapse measurement process. The photocurrent homodyne measurement signals [12] are given by $i_j(t) = \eta\kappa_{j+,t}\langle a_{j+}e^{-i\frac{\pi}{2}} + a_{j+}^\dagger e^{i\frac{\pi}{2}} \rangle_c(t) + \sqrt{\eta\kappa_{j+,t}}\xi_j(t)$, where $\xi_j(t) = dW_j/dt$.

As per above, a_{1+} must adiabatically follow the mechanical mode. For computational simplicity we assume that a_{2+} does as well. From the quantum Langevin equations we find $a_{1+} = i\frac{\chi_1}{\kappa_{1+} + \kappa_{1+,R}}n_b$ and $a_{2+} = i\frac{\chi_2}{\kappa_{2+} + \kappa_{2+,R}}(n_b^2 + An_b)$. Using this and the fact that the mechanical mode density matrix remains diagonal, we find

$$\begin{aligned} dp_n = & \gamma_{\text{th}}\bar{n}_{\text{th}}[np_{n-1} - (n+1)p_n]dt \\ & + (\gamma_{\text{th}}(\bar{n}_{\text{th}} + 1) + \gamma_{\text{cool}})[(n+1)p_{n+1} - np_n]dt \\ & - 2\sqrt{\eta\Gamma_1}(n - \langle n \rangle_c)p_ndW_1 \\ & - 2\sqrt{\eta\Gamma_2}((n^2 + An) - \langle n^2 + An \rangle_c)p_ndW_2. \end{aligned} \quad (4)$$

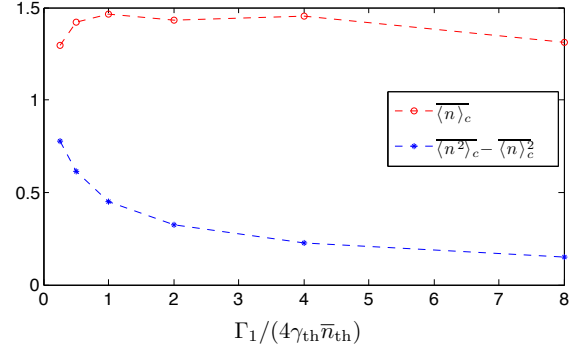


FIG. 1. Collapse of phonon number distribution with increasing n_b measurement strength (Γ_1) and constant $n_b^2 + n_b$ measurement strength (Γ_2). For each value of Γ_1 , the system is first allowed to reach steady-state, then $\langle n_b \rangle_c$, $\langle n_b^2 \rangle_c$, and $\langle n_b^2 \rangle_c - \langle n_b \rangle_c^2$ are obtained by computing $\langle n_b \rangle_c$ and $\langle n_b^2 \rangle_c$ at each subsequent time step and averaging for a sufficiently long time. The steady-state conditional variance decreases monotonically as a function of Γ_1 , and becomes much less than the unconditional variance when $\Gamma_1 \gg 4\gamma_{\text{th}}\bar{n}_{\text{th}}$, which is the regime in which quantum jumps arise in $\langle n_b \rangle_c(t)$ [4]. The values of $\langle n_b \rangle_c$ indicate that the measurement processes shift the mechanical mode out of perfect equilibrium with its effective thermal bath. Simulation parameters: $\Gamma_2 = 10^{-5}(4\gamma_{\text{th}}\bar{n}_{\text{th}})$, $\bar{n}_{\text{th}} = 5 \times 10^3$, $\gamma_{\text{cool}} = \gamma_{\text{th}}\bar{n}_{\text{th}}$, and $A = 1$.

where $\Gamma_j = \frac{\chi_j^2 \kappa_{j+,t}}{(\kappa_{j+} + \kappa_{j+,R})^2}$, and p_n is the occupation probability of the n th mechanical Fock state. The photocurrents become $i_1(t) = 2\eta\chi_1\langle n_b \rangle_c(t) + \sqrt{\eta\kappa_{1+,t}}\xi_1(t)$ and $i_2(t) = 2\eta\chi_2\langle n_b^2 + An_b \rangle_c(t) + \sqrt{\eta\kappa_{2+,t}}\xi_2(t)$. Here, Γ_1 is the same phonon number measurement rate discussed in the previous section. Provided that A (defined above) is known, for fixed values of Γ_j sufficiently long time-averages of $i_1(t)$, $i_1^2(t)$, and $i_2(t)$ yield the values of $\langle n_b \rangle_c$, $\langle n_b^2 \rangle_c$, and $\langle n_b^2 \rangle_c - \langle n_b \rangle_c^2$. We remind the reader that Γ_j are proportional to α_j , which can be adjusted *in-situ* by varying the optical drive strengths.

Assuming $T \approx 300$ mK, $\Omega \approx 2\pi \times 1$ MHz [9, 13], and $\gamma_{\text{th}} = 2\pi \times 0.1$ Hz [9], we find $\bar{n}_{\text{th}} = 5 \times 10^3$. As discussed above, we can set $\gamma_{\text{cool}} = \gamma_{\text{th}}\bar{n}_{\text{th}}$ so that $\bar{n}_b \approx 1$. Arbitrarily setting $A = 1$, we assume $\kappa_{1+} \gg 4\gamma_{\text{th}}\bar{n}_{\text{th}}$ so that Eq. (4) is valid and we numerically integrate it for different values of Γ_1 to produce the data shown in Fig. 1.

Conclusion and outlook.—This paper puts forth a new paradigm in which continuous weak measurement is used as an *in-situ* knob to control the quantum noise profile of a macroscopic degree of freedom, thus adding an additional capability to the toolbox of engineered quantum systems. The particular scheme presented is not far from experimental reality, as the latest iteration of the membrane-in-the-middle system in [13] shows impressive gains in the parameter space. A further order of magnitude increase in g_1 and optimization of $\kappa_{1\pm}$ should achieve $g_1 \gg \kappa_{1+}\kappa_{1-}$.

While in this paper the finite steady-state variance is the result of measurement-induced collapse being counteracted by a dissipative process, one can also imagine a scenario where the measurement-induced collapse in one variable may be counteracted by a continuous measurement on its conjugate variable. Also, in a many-body scenario changes in the quantum noise profile of degrees of freedom can lead to quantum phase transitions that dramatically change the bulk properties of the system, and it is interesting to consider the possibility of using the paradigm introduced in this paper to effect measurement-induced quantum phase transitions of engineered quantum metamaterials.

A. A. G. acknowledges the support of the Australian Research Council Centre of Excellence for Engineered Quantum Systems and the UQRS/UQIRTA scholarships, and is grateful to Gerard J. Milburn for discussions and critiques of the manuscript.

* a.gangat@physics.uq.edu.au

- [1] T. J. Kippenberg and K. J. Vahala, *Science* **321**, 1172 (2008); F. Marquardt and S. M. Girvin, *Physics* **2**, 40 (2009); M. Aspelmeyer *et al.*, *J. Opt. Soc. Am. B* **27**, A189 (2010); G. J. Milburn and M. J. Woolley, *Acta Physica Slovaca* **61**, 483 (2012); M. Aspelmeyer, P. Meystre, and K. Schwab, *Phys. Today* **65**, 29 (2012);

- M. Aspelmeyer, T. J. Kippenberg, and F. Marquardt, arXiv:1303.0733
- [2] A. A. Clerk, F. Marquardt, and J. G. E. Harris, *Phys. Rev. Lett.* **104**, 213603 (2010).
- [3] A. M. Jayich, J. C. Sankey, B.M. Zwickl, C. Yang, J. D. Thompson, S. M. Girvin, A. A. Clerk, F. Marquardt, and J. G. E. Harris, *New J. Phys.* **10**, 095008 (2008).
- [4] A. A. Gangat, T. M. Stace, and G. J. Milburn, *New J. Phys.* **13**, 043024 (2011).
- [5] S. Mancini, V. Giovannetti, D. Vitali, and P. Tombesi, *Phys. Rev. Lett.* **88**, 120401 (2002).
- [6] P. Pikovski, I. M. Vanner, M. Aspelmeyer, M. Kim, and C. Brukner, *Nature Phys.* **8** (2012).
- [7] J. D. Thompson, B. M. Zwickl, A. M. Jayich, F. Marquardt, S. M. Girvin, and J. G. E. Harris, *Nature (London)* **452**, 72 (2008).
- [8] M. Ludwig, A. H. Safavi-Naeini, O. Painter, and F. Marquardt, *Phys. Rev. Lett.* **109**, 063601 (2012).
- [9] J. C. Sankey, C. Yang, B. M. Zwickl, A. M. Jayich, and J. G. E. Harris, *Nature Phys.* **6**, 707 (2010).
- [10] H. Miao, S. Danilishin, T. Corbitt, and Y. Chen, *Phys. Rev. Lett.* **103**, 100402 (2009).
- [11] F. Marquardt, J. P. Chen, A. A. Clerk, and S. M. Girvin, *Phys. Rev. Lett.* **99**, 093902 (2007).
- [12] H. M. Wiseman and G. J. Milburn, *Quantum Measurement and Control* (Cambridge University Press, Cambridge, 2009).
- [13] N. E. Flowers-Jacobs, S. W. Hoch, J. C. Sankey, A. Kashkanova, A. M. Jayich, C. Deutsch, J. Reichel, and J. G. E. Harris, *Appl. Phys. Lett.* **101**, 221109 (2012).